FMU Δp-Indicators and Pressure Indicators Max 420 bar



# Measuring critical system parameters is essential

# Reliable and continuous control of the filter in all applications

The FMU range of filter condition indicators are designed for use on a wide range of Parker filters and competitive interchange filters.

Maximum pressure 420 bar.

A comprehensive range of high quality indicators for mobile, industrial and marine applications.



#### **Contact Information:**

Parker Hannifin **Hydraulic Filter Division Europe** 

European Product Information Centre Freephone: 00800 27 27 5374 (from AT, BE, CH, CZ, DE, EE, ES, FI, FR, IE, IT, PT, SE, SK, UK) filtrationinfo@parker.com

www.parker.com/hfde

#### **Product Features:**

- The FMU range of filter condition indicators, designed for use on a wide range of Parker filters.
- Accurate visual, electronic or electrical filter condition feedback.
- Maximum pressure 420 bar.
- Mobile, industrial and marine applications.



#### FMU Δp-Indicators and Pressure Indicators

#### Features & Benefits

Features	Advantages	Benefits
Indicators fatigue tested to full pressure rating	Reliable indicators for heavy duty applications	Reliable and continuous control of the filter in all applications
Cartridge screw-in type indicators	Easy mounting	Reliable sealing, no leakage
Visual, electrical and electronic indicators available	Check element condition at a glance Right style for the application	Optimises element life, prevents bypassing  Match your system's electrical connections
Several indication settings	Optimized for each bypass setting	Right indicator for application
Visual indicators	Local monitoring of the element condition	Reliable low cost indicator
Electrical indicator with change-over switch	Option of Normally Open (N.0.) and Normally Closed (N.C.) function	Approved for low voltage and high voltage use including machine control systems and PLC's
Electrical indicator with 4 LEDs	Thermal lock-out	No false alarm because of low temperature oil
	Visual early warning with yellow LED	Allows time to schedule element change
	Pre-alarm with yellow LED and wired output	Indicates upcoming element change
	Alarm with red LED and wired output	Clear indication for element change
Programmable and ATEX certified indicators available	Right indicators for special applications	Improved machine surveillance

#### **Typical Applications**

- Industrial equipment
- Mobile equipment
- Marine/offshore applications

# The Parker FMU Series Differential Pressure Indicators

The FMU range of filter condition indicators, are designed for use on a wide range of Parker filters and suitable for competitive interchange (consult Parker Filtration for details).

Ideal for giving accurate visual, electronic or electrical feedback of filter element condition, in order to facilitate effective maintenance and ensuring hydraulic systems, marine/mobile or industrial are protected from particulate contamination.





#### **Specification**

Maximum operating pressure:

420 bar (250 bar for aluminium).

Maximum differential pressure:

210 bar.

Working temperature range:
-20°C to +85°C with fluoroelastomer seals, -40°C to +85°C with nitrile and EPDM seals.

Material of housing:

Brass, aluminium or stainless steel.

Seals:

Fluoroelastomer, Nitrile or EPDM.

Mounting torque:

max. 75 Nm

(max. 50 Nm for aluminium indicator body & filter housing)

The differential pressure values of standard indicator models:

 $1.2 \text{ bar} \pm 0.2$ 

 $1.5 \text{ bar} \pm 0.2$ 

2.5 bar  $\pm$  0.3 5.0 bar  $\pm$  0.5

 $7.0 \text{ bar} \pm 0.5$ 

 $8.5 \text{ bar} \pm 0.5$ 

(Indicators for other differential pressure values are optional).

FMU ∆p – Indicators are typically used with the following filters:		
Heavy duty filters: GS, SF1040, DF2035, DF2050, DFH2060, DF2070, DF2089, DF2110 Note: FMU-Block is required to connect indicator to filter.	U12H	1.0 and 1.5 bar
Medium pressure filters series: 45M. High pressure filters series: 70L, 70T, 70B, 5000, 7100 and 7200. Heavy duty filter series: 130M, DF2145.	U12H	2.5 bar
High pressure filters without bypass valve: 70L, 70T, 70B, 7100 and 7200.	U12H	7.0 bar
Medium and low pressure filter series; Note for PD Range only 2.5 bar indicators are available: 15CN, 40CN, 80CN, 22PD, 32PD, 15P, 30P, 40RF, 50RF, IL8, 12M, 22M, 16P, 26P, 36P. Also heavy duty filter DF40.	U14M	1.2 and 2.5 bar
High pressure filters 18P, 28P, 38P, FDA, FDB	U14H	2.5 and 5.0 bar




### FMU Ap-Indicators and Pressure Indicators


#### **FMUT Electrical**

Rated	Non-in	ductive	load (A	A)	Inductive load (A)				Inrush		
voltage	Resistiv	ve load	Lamp			Inductive load		Inductive load Motor load		curre	
	N.C.	N.O.	N.C.	N.O.	N.C.	N.O.	N.C.	N.O.	N.C.	N.O.	
125VAC	į	5	1.5	0.7	(	3	2.5	1.3			
250VAC	;	3	1.0	0.5	2	2	1.5	0.8	20	10	
8VDC	5		6	2	5	4	3	3	max.	max.	
14VDC	5		6	2	4	4	3	3			
30VDC	4	4	2	2	3	3	3	3			
125VDC	0.4		0.	05	0.4	0.4	0.	05			
250VDC	0	.2	0.	03	0.2	0.2	0.	0.03			


Enclosure class	IP65	
Electrical connector	DIN 43650	
Overvoltage category	II (EN61010-1)	


#### **Contact configuration**

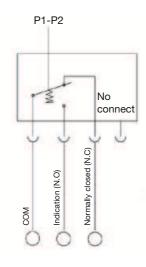

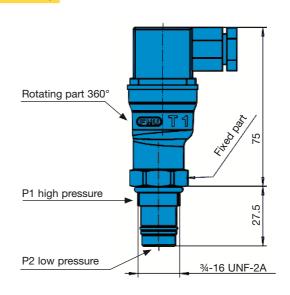


#### FMUM3 Visual Auto Reset/FMUM1 Visual Manual Reset

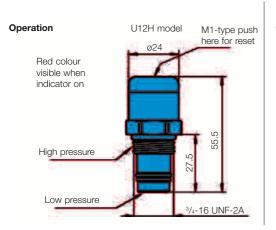

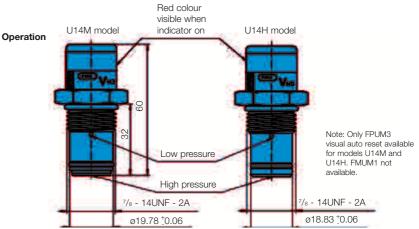



#### **FMUF Electronic**

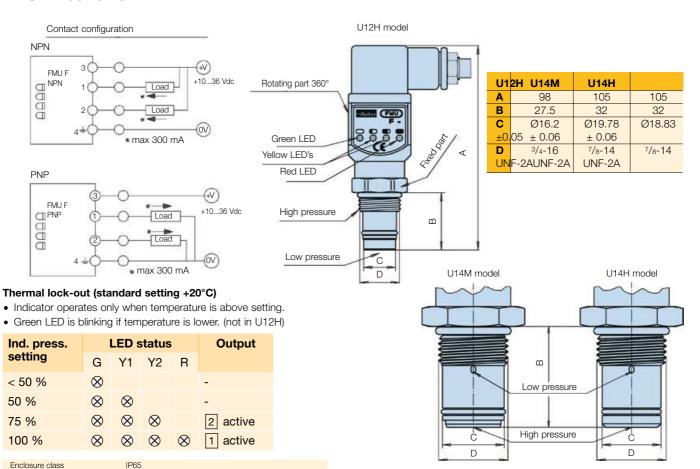

Note: Do not connect output terminals 1 or 2 directly (without load) to power supply terminals, because this will damage the equipment.

max. 300 mA/36 Vdc N.O. or N.C./NPN or PNF

DIN 43650, cable connection PG9 or optinally M12 4-pin

#### FMUL1 Programmable

Electrical connector
Input supply voltage

\*Indication output

Output type



Dimensions: see FMUF electronic Δp-indicator

#### Programmable ∆p-indicator

All settings adjustable (settings made via PC) Connections cable and software available from Parker

which is used in 420 bar filters

Safety feature: The 250 bar U14M indicator does not fit into the U14H cavity,

- 4 LEDs giving visual indication:
  - Green (G): Power ON
  - Yellow 1 (Y1): Pre-alarm 1 (presetting 50%)
  - Yellow 2 (Y2): Pre-alarm 2 (presetting 75%)
  - Red (R): Indication (presetting 100%)
- two independently programmable indication outputs
  - can be set independently from each other and LED setting
  - output type: NPN or PNP
  - switching type: N.O. or N.C.
- setting range: 0,5 ... 10 bar
- thermal lock-out range: 0 ... 100°C
- includes a microchip with memory logs
  - number of alarms: max 65535
  - time indication on (output 1): max 1092 hours
  - time power on (running hours): max 7 ½ years
  - upload and reset via PC



#### FMU Δp-Indicators and Pressure Indicators

#### **Ordering Information**

#### **Product configurator**

Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7	Box 8
FMU	М3	K	V	М	U14	Н	

#### Box 1

Code	
Indicator series	Code
Filter monitoring unit	FMU

Box 2	
Filter type	
Differential pressure indicator	Code
Visual manual reset	M1*
Visual autoreset	M3
Electrical	T1
Electronic 4 LED, PNP, N.O.	F1
Electronic 4 LED, NPN, N.O.	F2
Electronic 4 LED, PNP, N.C.	F3
Electronic 4 LED, NPN, N.C.	F4
Programmable with memory logs	L1
Ex version	V1

<sup>\*</sup>Available only with U12 thread

#### Box 3

Indicator setting			
Indicator setting	Standard	Code	
1.0 bar (14 psi)	С	F	
1.2 bar (17 psi)	а	G	
1.5 bar (21 psi)	С	H	
2.5 bar (35 psi)	a, b, c	K	
5.0 bar (70 psi)	b	M	
7.0 bar (98 psi)	С	N	
8.5 bar (125 psi)		Р	

Standard settings: a: U14M, former -W3 b: U14H, former -W6

c: U12H, former -F6

#### Box 4

Seal type			
Seal material	Code		
Nitrile	В		
Fluorelastomer	V		
EPDM	Е		
Neopren	N		

#### Box 5

Indicator body			
Indicator body	Code		
Aluminium (Box 7, code M)	А		
Brass (Box 7, code M and H)	M		
Stainless steel	R		

Box 6

Thread connection			
Thread connection	Code		
3/4" - 16UNF-2A	U12		
<sup>7</sup> / <sub>8</sub> " - 14UNF-2A	U14		
SAE 8	SO8		

#### Box 7 A - class products


Max Pressure		
Max pressure	Code	
CN, 15/30P & 22/32 PD Series	M	
45M, 130M, 70P & 18/28/38P	Н	
EPF, EMDPF	Omit	

#### Box 8

Options				
Options	Code			
Standard	omit			
Other options	factory supplied			

Note: F and L type indicators. Non-standard thermal lockout settings shown here.

#### **FMUX ATEX Approved Electronic**

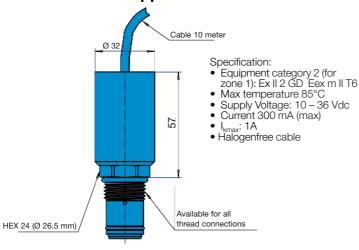

#### FMUX Indicator Information (see left) Indicator type X1: ATEX Ap-indicator

Electronic indicator accordant with ATEX 94/9/EC directive: (Ex) II 2 GD Eex mII T6.

Degree of protection IP66. X1 refers to PNP, N.O.

Other output options X2, X3 and X4 are available by request. (Refer to electronic F Type).

#### L1 Indicator Information (see previous page)

#### Connection cable + software for programmable indicator L1

Connection cable for PC serial connection and software for indicator settings and utilising memory logs.

**Ordering Code: 905075030** 

#### **General Information**

Seal kits (fluoroelastomer) Ordering code Indicators with thread connection U12H (former -F6) + S08 911045078 Indicators with thread connection U14M (former -W3) 911045086 Indicators with thread connection U14H (former -W6) 911045087

Note 1: Part numbers featured with bold highlighted codes will ensure a 'standard' product selection. Note 2: Alternate displayed part number selection will require you to contact Parker Filtration for availability




#### **Pressure Indicators for Low Pressure Filters**

#### **ETF Filter**


# GV/a GV/a QA (VG. F.)

Visual pressure indicator

# 48 Vdc electrical indicator 1.0 bar Code S2/S3




# 250 VAC electrical indicator 1.0 bar Code S4



Option	Description	Connection/Voltage	Wiring	Part number	
G2	Visual indicator 1.0 bar	N/A	N/A	FMUG2EBPG02L	
S2/S3	Electrical indicator 1.0 bar	42 Vdc max	Select either normally open (NO) or normally closed (NC)	FMUS2FBMG02L (NO switch) or FMUS3FBMG02L (NC switch)	Normally ope
S4	Electrical indicator 1.0 bar	250 Vac max	1 NC 2 NO 3 C	FMUS4FFAG02L	Normally close

#### Indicator PS NO or NC pressure switch





Normally closed contacts



Specifications				
Elec.rating	42V / 2A			
Thread connection	G¹/8			
Elec.connection	AMP terminal 6.3x0.8			
Protection	IP65 (terminal IP00)			
Switch type	NO or NC			
Code	FMUS2EBMG02L (NO switch)			
	FMUS3EBMG02L (NC switch)			

Visual indicator	1.2 bar
G¹/s: code	FMUG2EBPG02L

